

GEL COAT MEDIA FILTER




Neptune
for swimming pools

SCAN FOR
MORE INFO





KEY FEATURES


- Gel coat fibreglass tank with smooth finish.
- Top diffuser ensures even distribution of water over the filter media.
- Materials are reliable, non-corrosive and designed for all weather conditions.
- Suits all filter media; sand, zeolite and glass.
- Warranty: 10 years on tank, 2 years on MPV, 1 year on all other parts.

PRODUCT DIMENSIONS

Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Filter media quantity required (guide only)			
							Sand kg / 20kg bags	Zeolite kg / 15kg bags	Coarse Glass kg / 15kg bags	Fine Glass kg / 15kg bags
21 inch - SF500G	886	750	693	286	390	500	80 / 4	60 / 4	30 / 2	30 / 2
25 inch - SF650G40	998	862	805	318	500	650	140 / 7	105 / 7	45 / 3	60 / 4
25 inch - SF650G50	1034	887	821	251	500	650	140 / 7	105 / 7	45 / 3	60 / 4
30 inch - SF750G	1159	1029	945	393	500	750	260 / 13	195 / 13	60 / 4	135 / 9
36 inch - SF900G	1294	1163	1080	450	780	900	420 / 21	315 / 21	105 / 7	210 / 14

This is a guide only. Sand size may differ from country to country and therefore sand weights may vary.

DIAGRAM

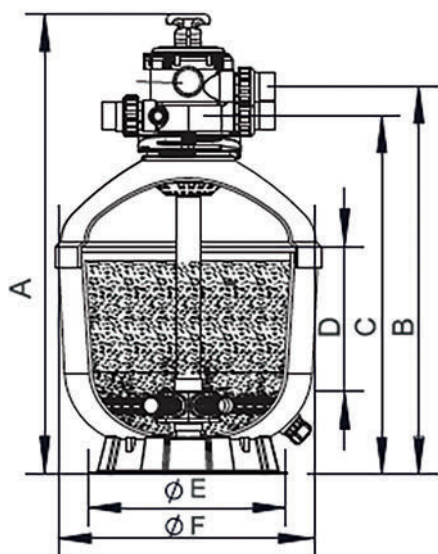

PRODUCT INFORMATION

Filter Size	Model	Valve Port Size	Filter Area (m ²)	Max Flow Rate
21 inch	SF500G	40mm / 1.5"	0.20	167L/min 10.0m ³ /h
25 inch	SF650G40	40mm / 1.5"	0.33	275L/min 16.5m ³ /h
25 inch	SF650G50	50mm / 2.0"	0.33	275L/min 16.5m ³ /h
30 inch	SF750G	50mm / 2.0"	0.44	366L/min 22.0m ³ /h
36 inch	SF900G	50mm / 2.0"	0.64	533L/min 32.0m ³ /h

TECHNICAL INFORMATION

FUNCTIONS : Refer to 6-Way Multi-port Valve

Max Working Pressure	250kPa / 36psi / 2.5bar
Factory Testing Pressure	400kPa / 58psi / 4.0bar
Max Water Temperature	43°C (109°F)
Size of Silica Sand	0.5-0.8mm
Max Filtration Velocity	50mm ³ / h / m ²

AVAILABLE FROM YOUR
LOCAL POOL PRO STOCKIST



TANK*



MPV*



PARTS*

* Warranty T&C's apply.